



ON CENTER SPACING - STAGGERED ROW
NO SCALE

USE DRYWALL SCREWS TO ATTACH 4-FOOT LONG VERTICAL 2" X 2" HARDWOOD STAKES TO 2" X 2" CROSSBARS AT LEAST 6 INCHES LONGER THAN THE TREE ROOT BALL DIAMETER TO STABILIZE THE ROOT BALL AND PREVENT THE TREE FROM LEANING.

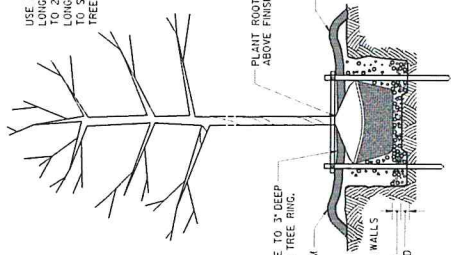


TREE PLANTING DETAIL - ELEVATION
NO SCALE

* SEE PLANS FOR DIMENSIONS AND ADDITIONAL DETAILS WHERE APPLICABLE.

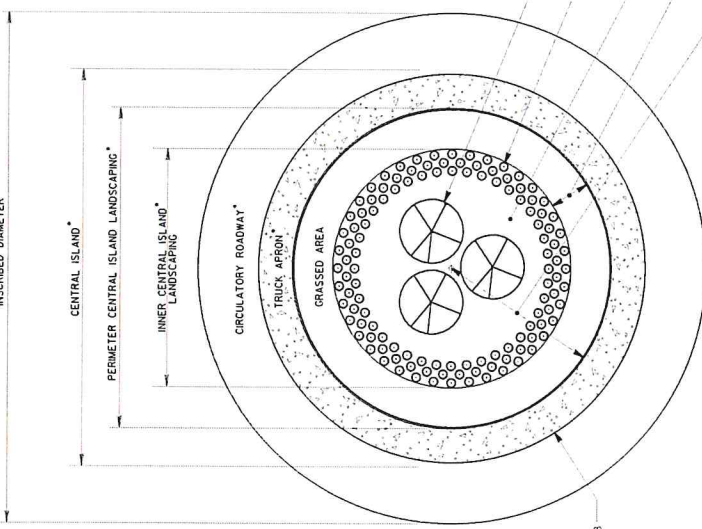


PLANTING LAYOUT
NO SCALE

ADJUST ANY WATER RESERVOIR BAG 50 EMITTERS DO NOT REST ON STAKES OR CROSSBARS



ALLOW TREE STAKING SYSTEM TO DEGRADATE IN PLACE.

TREE PLANTING DETAIL - PLAN
NO SCALE

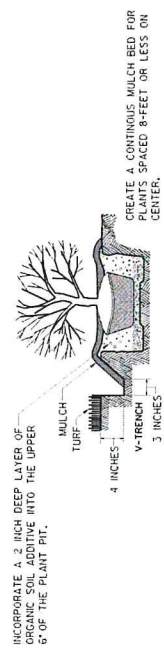

VINE AND SHRUB PLANTING DETAIL
NO SCALE

GENERAL NOTES:

1. SPECIFICATIONS: GEORGIA STANDARD CURRENT EDITION, AND SUPPLEMENTS THERE TO.
2. SEE SPECIAL PROVISIONS 700 AND 702 FOR PLANTING REQUIREMENTS.
3. SEE PLAN SHEETS FOR THE WIDTH OF THE PERIMETER CENTRAL ISLAND LANDSCAPING.
4. THE DESIGNER MAY SPECIFY ALTERNATE PLANT MATERIALS WITH PRIOR REVIEW AND APPROVAL BY THE OFFICE OF MAINTENANCE. IF ALTERNATE MATERIALS ARE SPECIFIED, THEY WILL BE DESCRIBED ELSEWHERE IN THE PLANS.
5. THIS DETAIL CAN BE INCORPORATED INTO PROJECT PLANS AFTER THE DEPARTMENT HAS ENTERED A SEPARATE RIGHT-OF-WAY MOVING AND MAINTENANCE AGREEMENT.

DEPARTMENT OF TRANSPORTATION STATE OF GEORGIA	
DATE	REVISION
CONSTRUCTION DETAIL	
ROUNDABOUT LANDSCAPING DETAILS	
NO SCALE	SEPTEMBER 2011
BY	NUMBER
	RA-1

PAY ITEM NUMBER	UNIT	PAY ITEM DESCRIPTION	BOTANICAL NAME	COMMON NAME	SIZE	SPACING
150-1000	LS	TRAFFIC CONTROL				
700-9100	5Y	CYTHAUS VINDIS	CYTHAUS VINDIS	HYBRID BERMUDA GRASS	3 INCH CALIPER	SPACING AS SHOWN
702-0470	EA	SPRING APPLICATION FERTILIZER		WINTER KING HAWTHORN	3 GAL	SPACING AS SHOWN
702-9005	LB	LANDSCAPE MULCH		FERTILIZER		SPACING AS SHOWN
702-9025	5Y			PINE STRAW MULCH		